






SELFLUBRICATED PLATES ASSEMBLY GUIDE

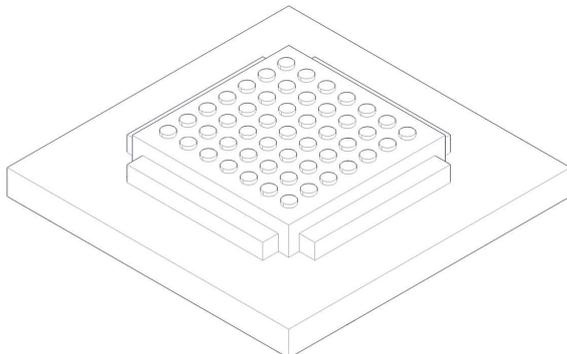

The plate will be sent pre-assembled.

The self lubricated plate consists of one or two graphite-bronze plates and one base plate linked by an Allen bolt. Four square bars frame the graphite-bronze.

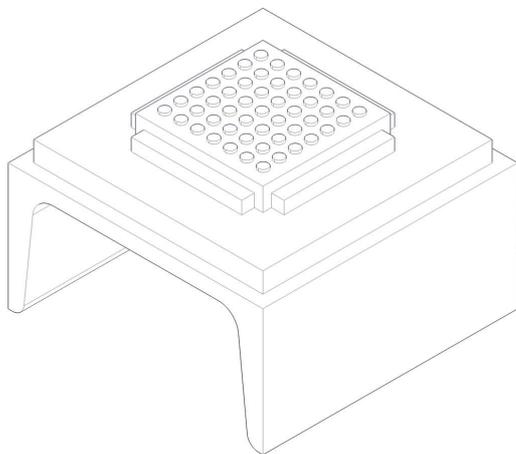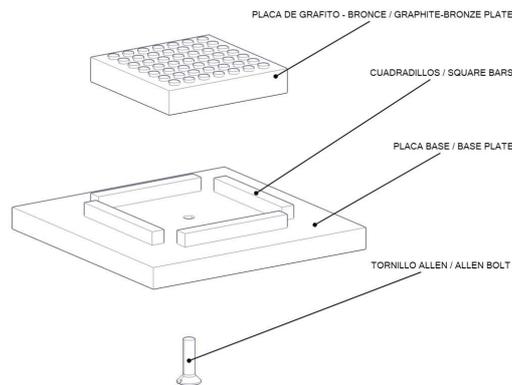

It is not necessary to disassemble the group. Just check that the bolt is right screwed and it doesn't stick out from the plate.

Weld the base plate in the right place following the engineering drawings.

When welding and painting the plate, you must protect the graphite-bronze plate preventing against spatters.

0	09/04/12	INFORMATION	JCC	JMD	
REV.	DATE	EDITED FOR	DRAW	CHECK	